

PUBLICATION NUMBER : 07214883
PUBLICATION DATE : 15-08-95


APPLICATION DATE : 09-02-94
APPLICATION NUMBER : 06035208

APPLICANT : MITSUBISHI PENCIL CO LTD;

INVENTOR : KOBAYASHI SEIICHI;

INT.CL. : B41K 1/50 B41K 1/52

TITLE : SEAL IMPRESSION

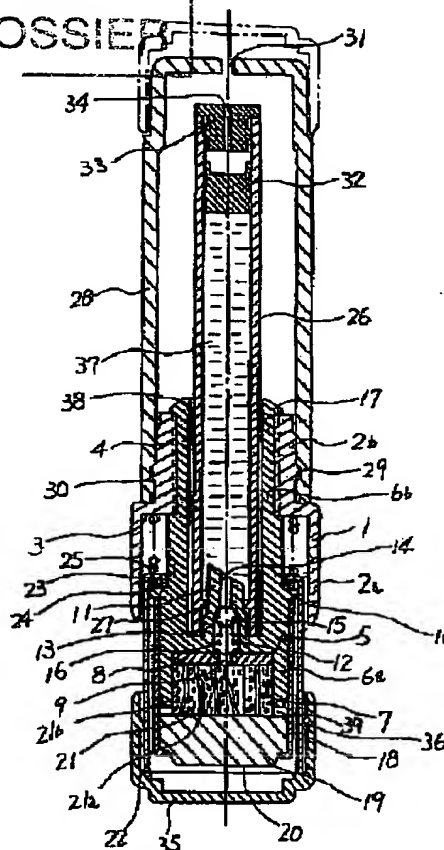

ABSTRACT : PURPOSE: To provide a seal impression without necessity of a vermilion ink-pad which has no complication of supplementing ink even if a large quantity of ink is wasted by continuous printing and provides stable printing density.

CONSTITUTION: The seam impression comprises an elastic ink supply unit 21 laminated on a lower end of an inner cylinder 5 and having a vent hole 21a communicating with front and rear end faces at an upper layer and a non-continuity pores 21b formed on an outer periphery except at least ends, and a printing unit 19 exposed at a printing surface 20 with the lower layer and having innumerable continuous vent holes to impregnate ink. An ink tank 26 is engaged with a rear inner hole 38 of the cylinder 5 to communicate with an ink guide hole 14 to guide ink to the unit 21. A valve mechanism is provided forward of the hole 14, the unit 21 is compressed by pressing the surface 20 at the time of sealing in the state that the valve mechanism is closed, ink occluded to the hole 21a is supplied to the unit 19, the valve mechanism in which a pressure is reduced by recovery of the unit 21 after sealing is opened, and the ink is sucked to the hole 21a of the unit 21.

COPYRIGHT: (C)1995,JPO